

 **ORIENT**CERAMICA

**STRUCTURE
SHINE**
EDITION 2025






MARMI TERRENO

MARMI TERRENO


FL MARMI TERRENO KR 600X1200 WT L

SIZE

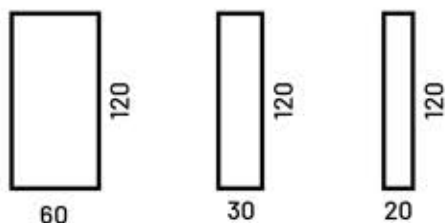

30X120 AND 20X120 WILL BE PRODUCED ON DEMAND

SURFACE & FINISH



STRUCTURE SHINE

AVAILABLE COLORS



Tile Face



Colors shown in the catalogue are for reference only. Please check physical tile before buying.


 **ORIENT CERAMICA**

MARMI CRESCENT

MARMI CRESCENT


FL MARMI CRESCENT TS 600X1200 GR L

SIZE

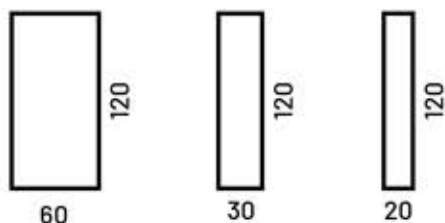

30X120 AND 20X120 WILL BE PRODUCED ON DEMAND

SURFACE & FINISH



STRUCTURE SHINE

AVAILABLE COLORS



Tile Face



Colors shown in the catalogue are for reference only. Please check physical tile before buying.

 **ORIENT CERAMICA**




SKYLINE KOHAT

SKYLINE KOHAT

FL SKYLINE KOHAT TS 600X1200 BG L

SIZE

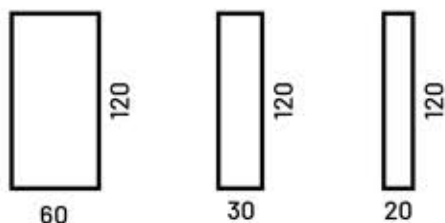

30X120 AND 20X120 WILL BE PRODUCED ON DEMAND

SURFACE & FINISH



STRUCTURE SHINE

AVAILABLE COLORS










Tile Face









Colors shown in the catalogue are for reference only. Please check physical tile before buying.

TECHNICAL DATA SHEET

| Sr. No. | TECHNICAL CHARACTERISTICS | STANDARD TEST METHOD | INTERNATIONAL STANDARD | ORIENT CERAMICA | |
|---------|---|-----------------------|------------------------|------------------------|------------------------|
| 1. |  | Length & Width | BS EN ISO 10545-2 | +/-0.6% | +/-0.1% |
| 2. |  | Thickness | BS EN ISO 10545-2 | +/-5.0% | +/-3.0% |
| 3. |  | Rectangle Squareness | BS EN ISO 10545-2 | +/-0.6% | +/-0.2% |
| 4. |  | Straightness of Sides | BS EN ISO 10545-2 | +/-5.0% | +/-0.2% |
| 5. |  | Surface of Flatness | BS EN ISO 10545-2 | +/-0.6% | +/-0.2% |
| 6. |  | Water Absorption | BS EN ISO 10545-2 | +/-5.0% | < 0.1% |
| 7. |  | Modulus of Rupture | BS EN ISO 10545-2 | >= 35N/mm ² | >= 40N/mm ² |

TECHNICAL DATA SHEET

| Sr. No. | | TECHNICAL CHARACTERISTICS | STANDARD TEST METHOD | INTERNATIONAL STANDARD | ORIENT CERAMICA |
|---------|---|-------------------------------|----------------------|-----------------------------|-----------------|
| 8. |  | Breaking Strength | BS EN ISO 10545-4 | ≥ 1300 N | +/-0.1% |
| 9. |  | Resistance to Deep Abrasion | BS EN ISO 10545-7 | ≤ 175 /mm ³ | +/-3.0% |
| 10. |  | Resistance to Thermal Shock | BS EN ISO 10545-9 | No visible defects | +/-0.2% |
| 11. |  | Frost Resistance | BS EN ISO 10545-12 | No visible damage | +/-0.2% |
| 12. |  | Resistance to Chemicals | BS EN ISO 10545-13 | No visible defects | +/-0.2% |
| 13. |  | Color Resistance to UV Lights | DIN 51094 | No change in color | $< 0.1\%$ |

ORIENT CERAMICA

The Only **Grès Porcelain** Tile Manufacturer in Pakistan.

